

Explanation

Hera Power Pack[®] 320; consists of power supply unit and full isolated DMX splitter. DMX isolates the signal independently from each other and delivers it with 5 Pin Push-Lock type Connector to power and DMX output. Furthermore, it is delivered to the standard DMX output by isolating it. It has 90~264VAC 50/60Hz Universal operating voltage and 320 Watt power. It has active PFC. It is manufactured at two different types as 24V and 48V. It has been shaped from plate, having aluminum body. It is produced RAL9004 black as a standard. It can be assembled to the walls with the lobes at the sides

- Legendary solution in long distance DMX transmission
- DMX input and output with standard Neutrik[®] DMX connectors
- Power output with 5 Pin Push-Lock connectors
- It is cooled down with adjustable speed fan
- Safe use in interior spaces with IP20 protection

Details

Power Supply:

Internal Power Supply 320 Watt With Active PFC

Input:

90~264VAC 50/60Hz Universal AC input / Full range

AC Input 3-Pin VDE Male Socket

Output:

Output 5-Pin IP67 Waterproof Connector (Power + DMX)

DMX Signal Input and Output 3 Pin XLR

Housing:

Aluminium Sheet Metal With Powder Finishing

Screw and Mounting Accessories:

Black Iron

Temperature:

Operating : -40°C - 50°C - (-40° - 122° F)

Storage : -40°C - 85°C - (-40°C - 185° F)

Dimensions (H x W x D):

55x250x200 mm (2,16x9,84x7,87 in)

Weight:


1,7 kg (3,7 lb)

Certification:

EU safety: EN 60950

EU EMC: EN 55103-1, EN 55103-2, EN 55022, EN 55024, EN 61000-3-2, EN 61000-3-3

US safety: ANSI/UL 60950-1

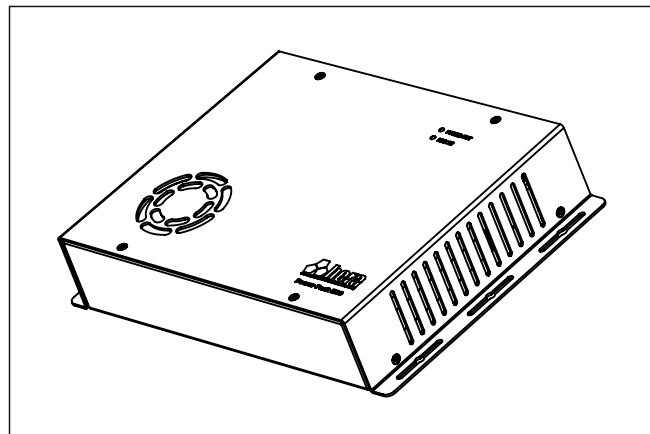

Ordering Information

Power Pack[®] 320-48 1x320W Power Supply

P08002

Power Pack[®] 320-24 1x320W Power Supply

P08010

*Standart product codes that we provided is above. Please contact us for special orders.

Technical Drawing

